

PROTECTOR XL-100

Exterior Acrylic Latex

- Early Rain & Surfactant Resistance
- Moisture Tolerant
- Outstanding Hide & Coverage
- Spatter Resistance
- Excellent Application
- Superior Color Retention
- Professional Grade & Value





Fortified with X-Link Technology

Paint For ALL Seasons










The Rodda Paint Difference

EARLY RAIN & SURFACTANT RESISTANCE

Method: ASTM D358 (Early water resistance)
Result: No blistering, lifting, wrinkling or washing off.

Method: ASTM D7190 (Surface resistance)

Result: Excellent

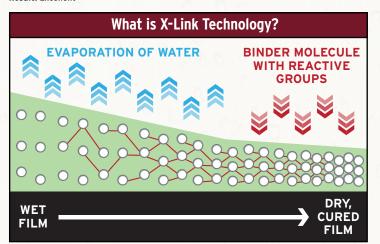

At 70F & 50% Relative Humidity:						
	35F - 50F	51F - 75F	76F - 95F			
Dry to Rain	1-2 Hours	1-1.5 Hours	1/2-1 Hour			
Dry to Touch	2-4 Hours	1-2 Hours	1/2-1 Hour 1-4 Hours			
Dry to Re-coat	12-48 Hours	5-11 Hours				




ProTector Leading National XL-100 Competitor

Early Rain Resistance Test							
300 —							
250 —							
200 —							
150 —							
100 —							
50 —							
0 —	Leading National Competitor	ProXL-100					
	Supply services and Tourist or Steen Adult Steen Subsection of the Supplement of the Control of	Velvet					

SPATTER RESISTANCE/EXCEPTIONAL COVERAGE

Method: ASTM D2805 • Result: No spatter (10)
Professional grade quality for application and surface protection.

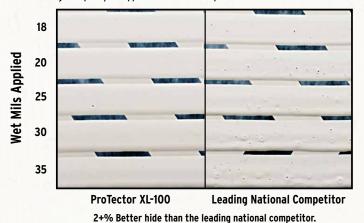

BEST IN CLASS ADVANTAGE

Property	ProTector XL-100	Leading National Competitor		
Early Rain Resistance (X-Link Technology)	+++	2 0		
Surfactant Leach Resistant (ASTM D7190)	++	+		
Coverage/Hide (ASTM D2805)	+++	+ 15 Years \$\$\$		
Spatter Resistance (ASTM D4707)	++			
Warranty	25 Years			
Affordability	\$\$			

ProTector XL-100 Technical Data

Si	Chann	Gloss	MPI Approved	Base	voc	Volume Solids	Film Thickness		Butuness	Minimum	Maximum	Applicator
	Sheen	Level					Wet	Dry	Reducers	Application Temp.	Application Temp.	Recommendation
	Flat	1	#10	White	<100 g/L	36% (Varies by	4.0 mils	s 1.4 mils	Not normally recommended. Reduce sparingly with water for spray applications in hot environments - See TDS for details.	35 F (substrate)	95 F (substrate)	
L	FIdl			Deep, Neutral	<50 g/L	Base and Color)						Nylon/Polyester Brush 3/8" - 3/4" Nap Synthetic Roller Cover 2000 psi Pressure Airless Spray with .015019 tip
	Velvet	et 2	#10	White	<100 g/L	36% (Varies by						
	veivet			Deep, Neutral	<50 g/L	Base and Color)						
Sa	Satin 3	,	#15	White	<100 g/L	31% (Varies by						
	Jailli	3	#15	Deep, Neutral	<50 g/L	Base and Color)						·

For additional details please see your Rodda Representative for the Technical Data Sheet (TDS) for this product.

Made in the Northwest, for the Northwest, since 1932.



6107 N. Marine Drive, Portland, OR 503-521-4300 | 800-452-2315 RoddaPaint.com | Follow Us **f** ② in **y** Ask your Rodda Paint representative about the new Cascadia Color Collection.

